


M6800 EXORtape

- Plug Compatible with the EXORciser
- Compatible with the EXORciser's EXbug Firmware and Resident Software
- Up to 25 Times Faster Than a Standard ASR-33 Teletype Reader
- Photo Electric Character Detector for More Reliable Loading
- Derated Long Life, Line Filament Type Lamp

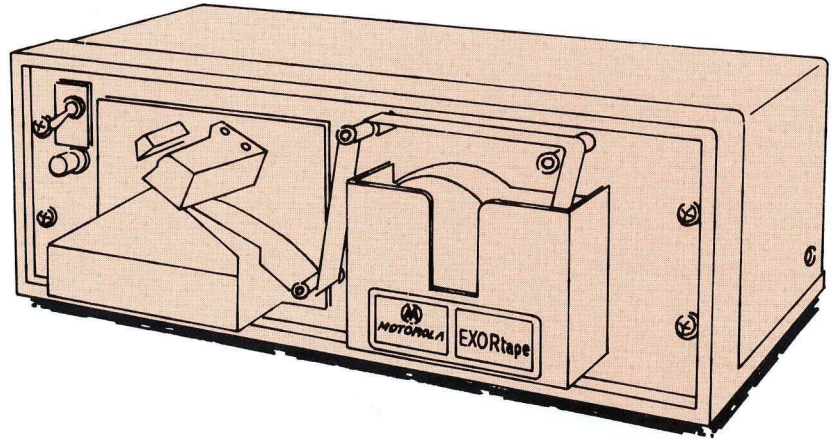

EXORtape is a high-speed paper-tape reader that provides an efficient means for program loading, editing and assembling. It is capable of loading up to 250 characters per second into EXORciser memory. The EXORtape connects to the EXORciser through the optional M6800 EXORciser Interface Module and is completely compatible with the EXORciser EXbug firmware and the M6800 Resident Software. Its Interface program also permits the user to daisy-chain other peripherals, such as the EXORdisk, into the system.

Specifications

Electrical	
Input Data	8 bits
Status Input	Reader busy
Start Command	HPST start bit
Power Requirements	115 Vac, 60 Hz single phase, 40 W
Optional	220 Vac, 50/60 Hz single phase
Manual Advance	Front panel push button
Speed	Up to 250 characters per second
Physical	
Cables	One 40 line ribbon cable, length 5 feet
Dimensions	
L x H x D	17-1/2 x 6 x 8-1/2"
Mounting	Stand alone, rubber feet, optimal 19 inch RETMA rack mount
Weight	10 pounds
I/O Cabling	Rear/Center
Tape Holder	Up to 5 inches diameter tapes

Options and Ordering Information

Part Number	Description
M68R680	Table Top EXORtape
M68R680-12	EXORtape with 220, 50/60 Hz Power Requirement
M68R680-19	19-inch Rack Mounting EXORtape
M68IFC	M6800 EXORciser Interface Module